



US 20140143643A1

(19) **United States**

(12) **Patent Application Publication**
Ayed et al.

(10) **Pub. No.: US 2014/0143643 A1**

(43) **Pub. Date: May 22, 2014**

(54) **METHODS AND APPARATUS TO LABEL RADIOLOGY IMAGES**

Publication Classification

(71) Applicant: **General Electric Company**,
Schenectady, NY (US)

(51) **Int. Cl.**
G06F 19/00 (2006.01)

(72) Inventors: **Ismail Ben Ayed**, London, CA (US);
Dmitry Pavlov, Park Ridge, NJ (US);
Kumaradevan Punithakumar, London
(CA); **Seyed-Parsa Hojjat**, London
(CA); **Gregory Garvin**, London (CA)

(52) **U.S. Cl.**
CPC **G06F 19/321** (2013.01)
USPC **715/202**

(73) Assignee: **General Electric Company**,
Schenectady, NY (US)

(57) **ABSTRACT**

(21) Appl. No.: **13/928,080**

Methods and apparatus are disclosed to label radiology images. An example system includes a processor and a database. In response to receiving a first user input via a data input, the processor is to generate first annotations on a spinal image. The processor is to cause the spinal image having the first annotations to be displayed at a user interface. The processor is to prompt a user to provide second user input identifying an error in the first annotations. In response to receiving the second user input, the processor is to generate second annotations on the spinal image. The second annotations is to correct the error in the first annotations.

(22) Filed: **Jun. 26, 2013**

Related U.S. Application Data

(60) Provisional application No. 61/728,405, filed on Nov. 20, 2012.

402



304

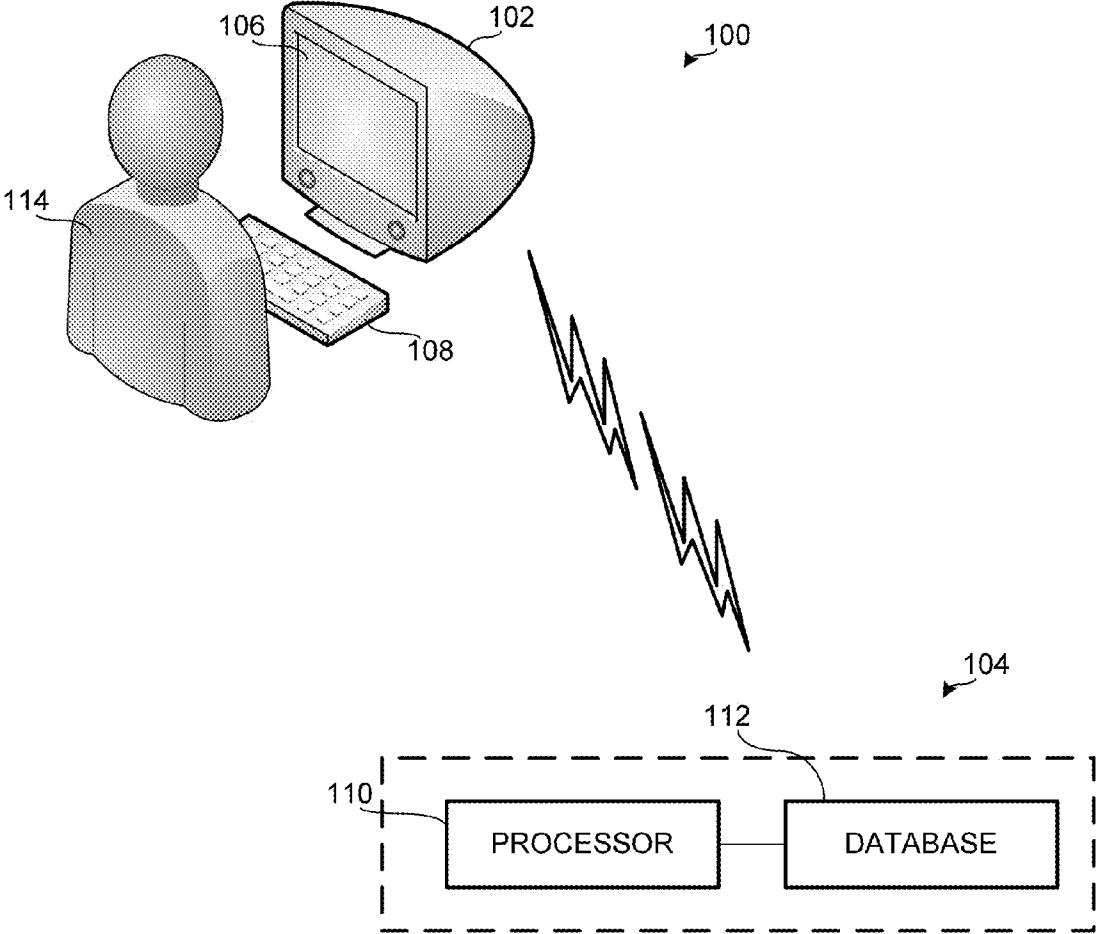


FIG. 1

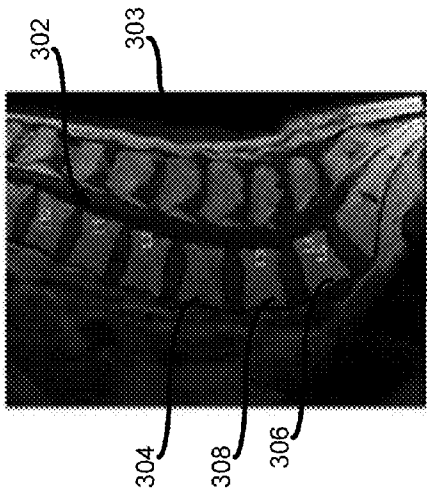


FIG. 2

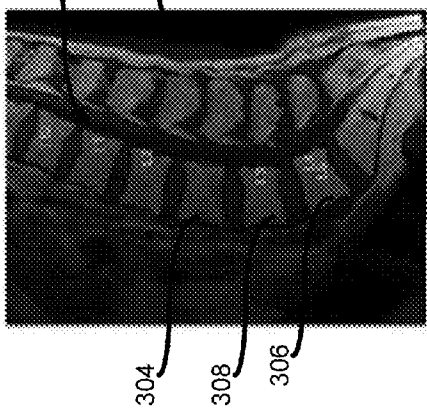


FIG. 3

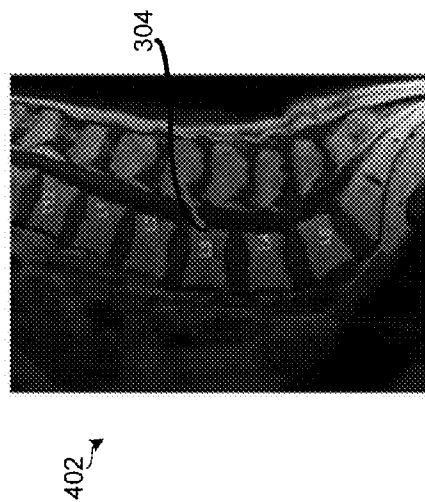


FIG. 4

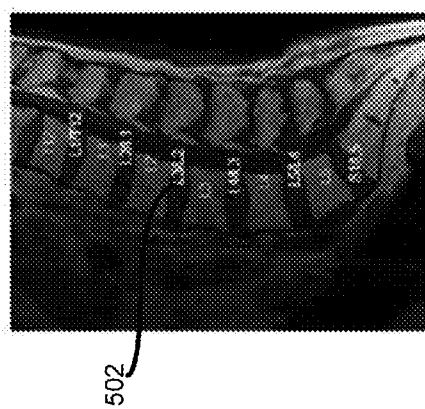


FIG. 5

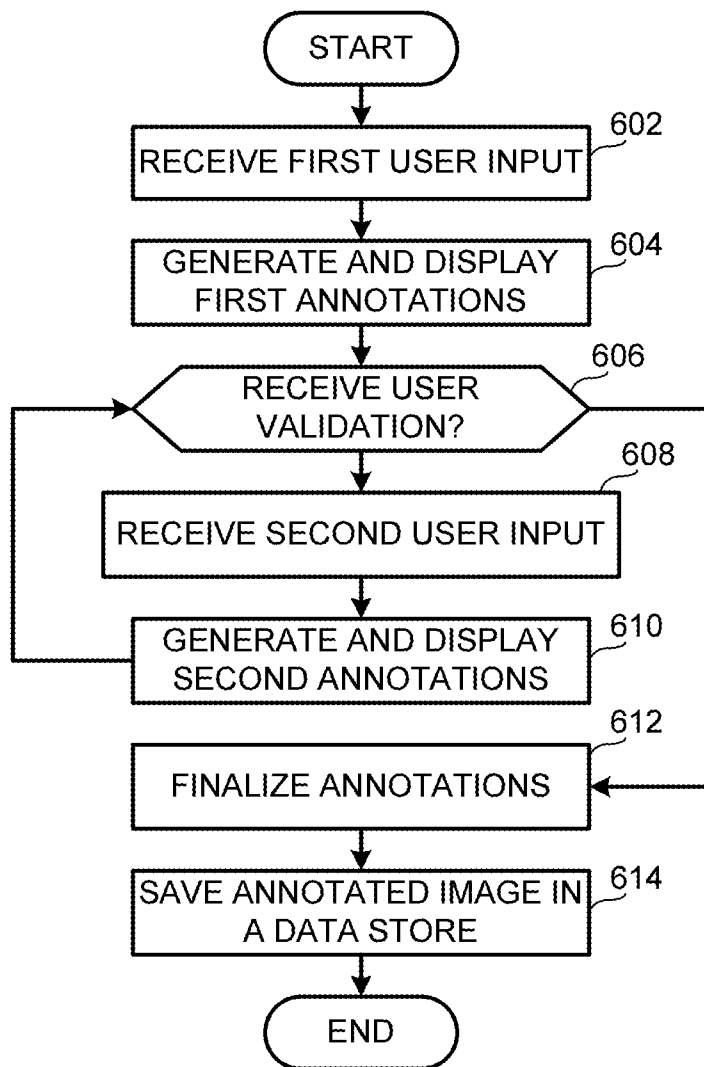


FIG. 6

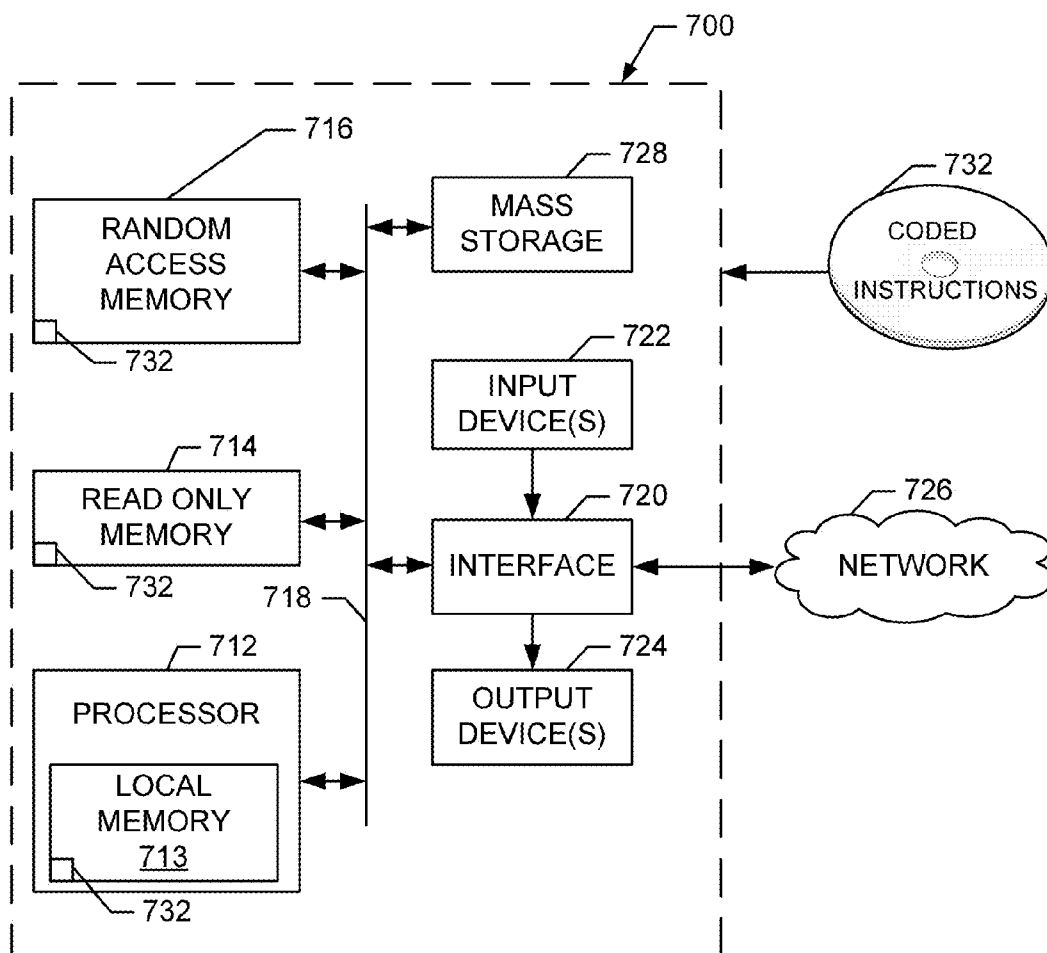


FIG. 7

METHODS AND APPARATUS TO LABEL RADIOLOGY IMAGES

RELATED APPLICATION

[0001] This patent arises from U.S. Provisional Application Ser. No. 61/728,405, which was filed on Nov. 20, 2012, and is hereby incorporated herein by reference in its entirety.

FIELD OF THE DISCLOSURE

[0002] This disclosure relates generally to labeling radiology images, and, more particularly, to methods and apparatus to label radiology images.

BACKGROUND

[0003] Spinal images may be obtained and used to diagnosis various spinal diseases. In some examples, these spinal images are manually annotated and/or labeled to identify the different vertebrae and/or disks. In other examples, these spinal images are automatically annotated and/or labeled to identify the different vertebrae and/or disks.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] FIG. 1 is a schematic illustration of an example system to annotate radiology images.

[0005] FIGS. 2-5 are radiology images in accordance with the teachings of this disclosure being annotated by the example system of FIG. 1.

[0006] FIG. 6 is a flowchart representative of machine readable instructions that may be executed to implement the system of FIG. 1.

[0007] FIG. 7 is a processor platform to execute the instructions of FIG. 6 to implement the system of FIG. 1.

[0008] Wherever possible, the same reference numbers will be used throughout the drawing(s) and accompanying written description to refer to the same or like parts.

DETAILED DESCRIPTION

[0009] Spinal images may be annotated and/or labeled to assist in analyzing such images and/or diagnosing various spine diseases, etc. However, correctly annotating and/or labeling these images is sometimes difficult because depending on the image being viewed, the number of visible vertebrae and/or discs vary. While these variations occur, some known automated and/or semi-automated spine labeling algorithms assume that regardless of the image being viewed and the actual number of visible vertebrae and/or discs present, the number of visible vertebrae and/or discs is the same. Thus, some known spine labeling algorithms do not accurately annotate and/or label spine images in instances when not all of the vertebrae are/or discs are visible.

[0010] The examples disclosed herein relate to annotating and/or labeling spine images. To overcome some of the deficiencies encountered with some known annotating and/or labeling methods (e.g., manual or automatic), the examples disclosed herein use an example semi-automated spine annotation algorithm and/or system that annotates and/or re-annotates a spine image based on initial user input and/or subsequent user input received (e.g., feedback on non-validated annotations generated).

[0011] For example, based on initial user input (e.g., identifying a vertebra), the system can automatically provide first annotations to a spine image and present the spine image

including the first annotations for user review. To quickly correct any errors included in the first annotations, the system receives user input and/or feedback with respect to the first annotations. In some examples, the user can provide input (e.g., identify new and/or improperly labeled vertebra and/or candidates) by clicking on a false positive, a false negative, a non-labeled and/or mislabeled vertebra and/or disc, etc. In response to the input and/or feedback received, the system takes into account the user input (e.g., new candidates for labeling based on user input, user identified vertebra and/or disc) and the known spatial organization of the vertebra and automatically provides second annotations and/or labels to the spine image for user review (e.g., the system re-annotates the spine image). The second annotations may correct at least one error present in the first annotations based on the user feedback received. In some examples, the user input and/or feedback is independent of the example annotation algorithm. In some examples, the system iterates and/or alternates between automatically annotating and/or labeling the spine image and receiving user input and/or feedback until the user validates the annotations and/or labels generated.

[0012] FIG. 1 depicts an example system 100 for annotating images such as spinal images. In some examples, the system 100 includes a computer 102 and an annotator 104 communicatively coupled to the computer 102. In this example, the computer 102 includes a user interface 106 and a data input (e.g., a keyboard, mouse, microphone, etc.) 108 and the annotator 104 includes a processor 110 and a database 112.

[0013] In some examples, the user interface 106 displays data such as images (e.g., spinal images, radiology images, etc.) and/or annotated images received from the annotator 104. In some examples, the user interface 106 receives commands and/or input from a user 114 via the data input 108. For example, in examples in which the system 100 is used to annotate spinal images, the user interface 106 displays a spinal image(s) and/or an annotated spinal image(s) and the user 114 provide(s) an initial input identifying, for example, a location of a vertebra on the spinal image(s) and/or provides subsequent input identifying, for example, an error in the annotations generated on the spinal image.

[0014] In some examples, after the user interface 106 displays a spinal image (e.g., a T1-weighted MRI image, a non-annotated spinal image), the user 114 may select and/or identify a vertebra (FIG. 2, 202) using the data input 108 and, in response to receiving this user input, the annotator 104 uses the first user input to generate first annotations (FIG. 3, 302) on the spinal image (FIG. 3, 302). While the annotator 104 can generate annotations using any suitable labeling algorithm, in some examples, the annotator 104 generates the first annotations 302 from an initial set of spatially ordered points, x_1^0, \dots, x_N^0 , where $N=6$ and x_{N-1}^0 corresponds to the L1 vertebra, x_{N-2}^0 corresponds to the L2 vertebra, etc.

[0015] Additionally or alternatively, in some examples, the annotator 104 generates the first annotations 302 by automatically detecting connected regions of the spinal image that are consistent with an image context of the vertebrae and selecting N-points on the spinal image that follow and/or befit the shape of the spine. In some examples, the annotator 104 automatically detects the connected regions by using data stored in the database 112 such as contextual information about spines, vertebrae and/or neighboring structures and/or

other optimization and/or statistical modeling techniques (e.g., by interpolating based on statistical data and/or models), etc.).

[0016] In some examples, the connected regions may be detected by generating and/or building contextual-information features, statistical modeling the contextual information within the vertebrae and/or finding the centroids of all connected-component regions whose contextual features are consistent with the statistical model. In some examples, the contextual-information features are generated and/or built by generating a feature vector, $F(p)$, for each point, p , in the image domain. For example, for each point, p , a 3-dimensional feature vector, $F(p)=(F_1, F_2, F_3)$, may be built, where F_1 is the mean intensity within a 3×10 rectangularly-shaped, vertically-oriented patch centered at point, p , F_2 is the mean intensity within a 10×3 rectangularly-shaped, horizontally-oriented patch centered at point, p and F_3 corresponds to the intensity of a pixel, p .

[0017] In some examples, the feature vector contains image statistics within several box-shaped image patches of different orientations and/or scales. Such patch-based features may encode contextual information about the vertebrae and/or neighboring structures (e.g., size, shape, orientation, relationships to neighboring structures, etc.).

[0018] In some examples, the contextual information within the vertebrae may be statistically modeled by building a multi-dimensional model distribution using all the feature vectors, $F(p)$, within a circle and/or space centered at and/or around the first user input (e.g., the one-click user input).

[0019] In some examples, the centroids of all connected-component regions whose contextual features are consistent with the statistical model are determined by optimizing a cost function containing two constraints. In this example, the first constraint is based on a Bhattacharyya measure of similarity between feature distributions. In some examples, the first constraint substantially ensures the obtained and/or identified spinal regions are consistent with the statistical model. In this example, the second constraint is a smoothness constraint that removes small and isolated regions caused by imaging noise. In some examples, the second constraint substantially ensures that the surfaces are smooth. In some examples, K -regions of the spinal image are obtained and $[z_1, \dots, z_K]$ are the centroids of these regions.

[0020] In some examples, N -points that follow and/or befit the shape of the spine may be selected using Equation 1 and/or by choosing N -points out of all possible combinations of N -points in the set of determined centroids, $[z_1, \dots, z_K]$. Referring to Equation 1, V_i is the vector pointing from x_i to x_{i+1} , $i=1, \dots, N-1$, where $V_i=x_{i+1}-x_i$.

$$[\hat{x}_1, \dots, \hat{x}_N] = \max_{[x_1, \dots, x_N] \subset \{z_1, \dots, z_K\}} \sum_{i=1}^{N-1} \cos(V_i, V_{i+1}) + \sum_{i=1}^{N-1} \min\left(\frac{\|V_i\|}{\|V_{i+1}\|}, \frac{\|V_{i+1}\|}{\|V_i\|}\right) \quad \text{Equation 1}$$

[0021] As shown in FIG. 3, some of the first annotations **302** generated may contain errors. For example, the first annotations **302** failed to label the L3 vertebra **304** (e.g., a false negative), the first annotations **302** labeled the L5 ver-

tebra **306** as both L4 and L5 (false positive) and the first annotations **302** incorrectly labeled the L4 vertebra **308** as the L3 vertebra (incorrect label).

[0022] In response to reviewing the first annotations **302**, the user **114** may use the input device **108** to identify one of the errors present within the first annotations **302** (e.g., a single-click correction, second user input, subsequent user input). For example, as shown in FIG. 4, the user **114** identifies and/or selects the L3 vertebra **304**, which the first annotations **302** failed to label. In some examples, the annotator **104** may receive the second user input and generate second annotations **402** based on a new set of spatially ordered points, as shown in Equation 2, where x_{new}^i corresponds to the coordinate vector of the new point entered by the user **114** (second user input, new candidate). In some examples, Equation 2 is solved for by choosing N points $[\hat{x}_1, \dots, \hat{x}_N]$ out of the $N+1$ points in P_i by enforcing Equations 2, 3, 4.

$$P_i = [x_n^i, \dots, x_N^i, x_{new}^i] \quad \text{Equation 2}$$

[0023] Referring to Equation 3, $[\hat{x}_1, \dots, \hat{x}_N]$ maximizes the shape-based criterion over all possible combinations of N points $[x_1, \dots, x_N]$ in P_i where $x_{new}^i \in [\hat{x}_1, \dots, \hat{x}_N]$ ensures that the solution of Equation 3 contains the second user input. Thus, in response to receiving the second user input, the annotator **104** reassigns the labels and/or annotations **304**, **306**, **308** by taking into account the second user input (e.g., new candidates and/or identified vertebra) and/or the known spatial organization of the vertebrae. As shown in Equation 3, $\sum_{k=1}^{N-1} (\cos V_k, V_{k+1})$ is an angle constraint and

$$\sum_{k=1}^{N-1} \min\left(\frac{\|V_k\|}{\|V_{k+1}\|}, \frac{\|V_{k+1}\|}{\|V_k\|}\right)$$

is a distance constraint. In some examples, the angle constraint substantially ensures that each neighboring vertebrae $[x_k, x_{k+1}, x_{k+2}]$ is almost and/or substantially aligned and the distance constraint substantially ensures that the distances between neighboring vertebrae are approximately the same.

$$[\hat{x}_1, \dots, \hat{x}_N] = \max_{[x_1, \dots, x_N] \subset P_i} \sum_{k=1}^{N-1} \cos(V_k, V_{k+1}) + \sum_{k=1}^{N-1} \min\left(\frac{\|V_k\|}{\|V_{k+1}\|}, \frac{\|V_{k+1}\|}{\|V_k\|}\right) \quad \text{Equation 3}$$

[0024] Equation 4 describes vector pointing for x_k to x_{k+1} , V_k , where $k=1, \dots, N-1$.

$$V_k = x_{k+1} - x_k \quad \text{Equation 4}$$

[0025] As shown in FIG. 4, the second annotations **402** may be displayed via the user interface **106** for user review. In response to reviewing the second annotations **402**, the user **114** may validate the second annotations **402** as being accurate or identify an additional error present within the second annotations **402** (e.g., a single-click correction, third user input, subsequent user input). If the user **114** identifies another error, the loop identified by Equation 5 is repeated until the user **114** validates the annotations.

$$i \rightarrow i+1; \text{ and } [x_1^i, \dots, x_N^i] \rightarrow [\hat{x}_1, \dots, \hat{x}_N] \quad \text{Equation 5}$$

[0026] If the user **114** validates the second annotations **402**, the annotator **104** automatically completes the labeling of the

remaining vertebrae, if any, using information from the N-vertebra labeling from Equation 3. In some examples, $[\hat{x}_1, \dots, \hat{x}_N]$ is set to the corrected N-vertebra labeling (e.g., the vertebrae identified including the initial and subsequent user input) and the annotator **104** solves for and/or iterates Equation 6 for $j=1, 2, \dots$ if points $2x_{N+j-1}$ and X_{N+j-2} exist.

$$x_{N+j} = 2x_{N+j-1} - x_{N+j-2} \tag{Equation 6}$$

[0027] In some examples, if x_{N+j} falls within a spatial image domain, the annotator **104** assigns a label to x_{N+j+2} . For example, if $N=6$, $x_{N+1} \rightarrow T11$ for $j=1$, $x_{N+2} \rightarrow T10$ for $j=2$, $x_{N+3} \rightarrow T9$ for $j=3$, etc. However, if x_{N+j} does not fall within the spatial image domain, the annotator **104** exits the loop of Equation 6.

[0028] In some examples, once the vertebrae are annotated and/or labeled, the annotator **104** annotates the discs **502** of the spinal image using the second annotations **402** and/or the annotations determined using Equation 6 above. In some examples, $[x_1, \dots, x_M]$ corresponds to the completed M-vertebra labeling determined using Equation 5, where $M \rightarrow N$. In some examples, Equations 7 and 8 may be used to determine the coordinates of the M-discs, where disc labels are assigned to $[y_0, y_1, \dots, y_{M-1}]$ to account for the spatial ordering of the spine discs

$$y_0 \rightarrow \frac{S1}{L5}, y_1 \rightarrow \frac{L5}{LA}, y_2 \rightarrow \frac{LA}{L3}$$

$$y_i = \frac{x_i + x_{i+1}}{2} \forall i \in [1, \dots, M-1], \text{ and} \tag{Equation 7}$$

$$y_0 = \frac{3x_1}{2} - \frac{x_2}{2} \tag{Equation 8}$$

[0029] FIG. 6 depicts a manner of implementing the system **100** of FIG. 1. While an example manner of implementing the system of FIG. 1 has been illustrated in FIG. 6, one or more of the elements, processes and/or devices illustrated in FIG. 6 may be combined, divided, re-arranged, omitted, eliminated and/or implemented in any other way. Further, the example annotator **104**, the example processor **110**, the example computer **102** and/or, more generally, the example flowchart of FIG. 6 may be implemented by hardware, software, firmware and/or any combination of hardware, software and/or firmware. Thus, for example, any of the example annotator **104**, the example processor **110**, the example computer **102** and/or, more generally, the example flowchart of FIG. 6 could be implemented by one or more circuit(s), programmable processor(s), application specific integrated circuit(s) (ASIC(s)), programmable logic device(s) (PLD(s)) and/or field programmable logic device(s) (FPLD(s)), etc. When any of the apparatus or system claims of this patent are read to cover a purely software and/or firmware implementation, at least one of the example annotator **104**, the example processor **110** and/or the example computer **102** are hereby expressly defined to include a tangible computer readable medium such as a memory, DVD, CD, Blu-ray, etc. storing the software and/or firmware. Further still, the example flowchart of FIG. 6 may include one or more elements, processes and/or devices in addition to, or instead of, those illustrated in FIG.

6, and/or may include more than one of any or all of the illustrated elements, processes and devices.

[0030] A flowchart representative of example machine readable instructions for implementing the system **100** of FIG. 1 is shown in FIG. 6. In this example, the machine readable instructions comprise a program for execution by a processor such as the processor **712** shown in the example computer **700** discussed below in connection with FIG. 7. The program may be embodied in software stored on a tangible computer readable medium such as a CD-ROM, a floppy disk, a hard drive, a digital versatile disk (DVD), a Blu-ray disk, or a memory associated with the processor **712**, but the entire program and/or parts thereof could alternatively be executed by a device other than the processor **712** and/or embodied in firmware or dedicated hardware. Further, although the example program is described with reference to the flowchart illustrated in FIG. 6, many other methods of implementing the example system **100** may alternatively be used. For example, the order of execution of the blocks may be changed, and/or some of the blocks described may be changed, eliminated, or combined.

[0031] As mentioned above, the example processes of FIG. 6 may be implemented using coded instructions (e.g., computer readable instructions) stored on a tangible computer readable medium such as a hard disk drive, a flash memory, a read-only memory (ROM), a compact disk (CD), a digital versatile disk (DVD), a cache, a random-access memory (RAM) and/or any other storage media in which information is stored for any duration (e.g., for extended time periods, permanently, brief instances, for temporarily buffering, and/or for caching of the information). As used herein, the term tangible computer readable medium is expressly defined to include any type of computer readable storage and to exclude propagating signals. Additionally or alternatively, the example processes of FIG. 6 may be implemented using coded instructions (e.g., computer readable instructions) stored on a non-transitory computer readable medium such as a hard disk drive, a flash memory, a read-only memory, a compact disk, a digital versatile disk, a cache, a random-access memory and/or any other storage media in which information is stored for any duration (e.g., for extended time periods, permanently, brief instances, for temporarily buffering, and/or for caching of the information). As used herein, the term non-transitory computer readable medium is expressly defined to include any type of computer readable medium and to exclude propagating signals. As used herein, when the phrase “at least” is used as the transition term in a preamble of a claim, it is open-ended in the same manner as the term “comprising” is open ended. Thus, a claim using “at least” as the transition term in its preamble may include elements in addition to those expressly recited in the claim.

[0032] The program of FIG. 6 begins at block **602** where the computer **102** receives, via the data input **108**, initial input on a spine image displayed at the user interface **106** and/or stored in the database **112** (block **602**). In some examples, the initial input is associated with the user **114** clicking on a vertebra of the displayed spinal image and/or labeling it manually. For example, if the L5 vertebra may be clicked (e.g., one-click, single click), identified and/or labeled by the user. In some examples, the initial user input identifying a feature and/or vertebra on the spinal image assists and/or enables the example and/or selected automated and/or semi-automated annotating algorithm to annotate and/or label the remaining vertebrae and/or discs. In some examples, the

examples disclosed herein can be employed with various annotating algorithms and/or software.

[0033] At block **604**, the annotator **104** generates initial spinal labeling results and/or annotations using the example and/or selected automated and/or semi-automated annotating algorithm (block **404**). For example, based on the initial user input of identifying the L5 vertebra, the annotator **104** labels the L1 vertebra, the L2 vertebra, the L3 vertebra, etc. and these first annotations may be displayed at the user interface **106** for user review.

[0034] At block **606**, the user **114** reviews the first annotations and the computer **102** prompts the user regarding the validity of the first annotations and/or receives a decision of whether the first annotations are valid (block **606**). If the first annotation are not validated (e.g., there is at least one error present in the first annotations), the computer **102** may receive second user input relating to the error in the generated annotations (**608**). In some examples, the second user input identifies a false positive in the first annotations, a false negative in the first annotations and/or an incorrect label in the first annotations. In some examples, a false positive occurs when the annotator **104** detects a vertebra where none exists. In some examples, a false negative occurs when the annotator **104** fails to detect a vertebra. In some examples, an incorrect labeling occurs when a target vertebra is detected but assigned an incorrect label. In some examples, the user **114** identifies an error in the first annotations via a single-click correction using the data input **108**. For example, if the first annotations fail to and/or incorrectly label the L3 vertebra, the user **114** can click on the L3 vertebra and/or enter a correct label for the L3 vertebra.

[0035] At block **610**, second annotations are generated in response to receiving the second user input (block **610**).

In some examples, in response to receiving the user input, the annotator **104** automatically selects a new set of candidates (e.g., possible vertebra) and/or points on the spinal image that better fit the shape of the spine. The new set of candidates and/or points includes the initial user input, the subsequent user input, point input and/or identified by the user **114**. For example, based on subsequent user input received identifying a false positive, the annotator **104** removes the point associated with the falsely identified point from the set of points. In some examples, when selecting a new set of candidates, points and/or possible vertebrae, the annotator **104** uses shape-based criterion having angle and distance constraints. In some examples, the angle constraint substantially ensures that each three neighboring vertebrae is almost and/or substantially aligned. In some examples, the distance constraint substantially ensures that the distance between neighboring vertebrae is substantially and/or approximately the same. In some examples, the annotator **104** uses the constraints, the subsequent user input (e.g., the newly identified point and/or candidate) and/or known spatial organization of the vertebrae (e.g., L1 is below T12, L2 is L1, etc.) to generate the second annotations that are more accurate than and/or remove at least one error present in the first annotations. In some examples, blocks **606**, **608** and **610** are repeated and/or iterated until the user **114** validates the annotations generated and/or displayed.

[0036] At block **620**, the annotator **104** finalizes the annotations (block **620**). For example, the annotator **104** annotates any non-labeled vertebrae using information obtained and/or associated with generating the second annotations. In some examples, any remaining vertebrae are annotated using point

coordinates for labeled vertebrae and, if the coordinates fall within a spatial image domain, the annotator **104** assigns annotations and/or labels based on the coordinates. Additionally or alternatively, the annotator **104** finalizes the annotations by annotating the discs between the vertebrae. In some examples, the discs are annotated by determining the coordinates of the discs based on the coordinates and/or annotated vertebrae and assigning labels to the discs based on the spatial ordering of the spine discs. In some examples, the annotated spine including vertebrae and disc labels is displayed to the user **114** using the user interface **106** and/or saved in the database **112** (block **614**).

[0037] FIG. 7 is a block diagram of an example computer **700** capable of executing the instructions of FIG. 6 to implement the system of FIG. 1. The computer **700** can be, for example, a server, a personal computer, a mobile phone (e.g., a cell phone), a personal digital assistant (PDA), an Internet appliance or any other type of computing device.

[0038] The system **700** of the instant example includes a processor **712**. For example, the processor **712** can be implemented by one or more microprocessors or controllers from any desired family or manufacturer.

[0039] The processor **712** includes a local memory **713** (e.g., a cache) and is in communication with a main memory including a volatile memory **714** and a non-volatile memory **716** via a bus **718**. The volatile memory **714** may be implemented by Synchronous Dynamic Random Access Memory (SDRAM), Dynamic Random Access Memory (DRAM), RAMBUS Dynamic Random Access Memory (RDRAM) and/or any other type of random access memory device. The non-volatile memory **716** may be implemented by flash memory and/or any other desired type of memory device. Access to the main memory **714**, **716** is controlled by a memory controller.

[0040] The computer **700** also includes an interface circuit **720**. The interface circuit **720** may be implemented by any type of interface standard, such as an Ethernet interface, a universal serial bus (USB), and/or a PCI express interface.

[0041] One or more input devices **722** are connected to the interface circuit **720**. The input device(s) **722** permit a user to enter data and commands into the processor **712**. The input device(s) can be implemented by, for example, a keyboard, a mouse, a touchscreen, a track-pad, a trackball, isopoint and/or a voice recognition system.

[0042] One or more output devices **724** are also connected to the interface circuit **720**. The output devices **724** can be implemented, for example, by display devices (e.g., a liquid crystal display and/or a cathode ray tube display (CRT)). The interface circuit **720**, thus, typically includes a graphics driver card.

[0043] The interface circuit **720** also includes a communication device (e.g., communication device **56**) such as a modem or network interface card to facilitate exchange of data with external computers via a network **726** (e.g., an Ethernet connection, a digital subscriber line (DSL), a telephone line, coaxial cable, a cellular telephone system, etc.).

[0044] The computer **700** also includes one or more mass storage devices **728** for storing software and data. Examples of such mass storage devices **728** include floppy disk drives, hard drive disks, compact disk drives and digital versatile disk (DVD) drives. The mass storage device **728** may implement the local storage device **762**.

[0045] The coded instructions **732** of FIG. 6 may be stored in the mass storage device **728**, in the volatile memory **714**, in

the non-volatile memory 716, and/or on a removable storage medium such as a CD or DVD.

[0046] From the foregoing, it will appreciate that the above disclosed methods and apparatus provide an interactive protocol that enables fast and user-friendly corrections and/or visualizations of spine annotations and/or substantially guarantees correct results in substantially all clinical scenarios. The above disclosed methods and apparatus enable annotations to be rapidly corrected independent of the choice of a labeling algorithm and/or any associated software.

[0047] It is noted that this patent claims priority from U.S. Provisional Application Ser. No. 61/728,405, which was filed on Nov. 20, 2012, and is hereby incorporated herein by reference in its entirety.

[0048] Although certain example methods, apparatus and articles of manufacture have been described herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers all methods, apparatus and articles of manufacture fairly falling within the scope of the claims of this patent.

What is claimed is:

- 1. A computer-implemented method, comprising:
generating first annotations on a spinal image;
receiving first user input from a user on the first annotations to identifying an error within the first annotations; and
in response to receiving the first user input, generating second annotations on the spinal image, the second annotations to correct the error present within the first annotations.
- 2. The computer-implemented method of claim 1, wherein generating the first and second annotations is independent of the first input received.
- 3. The computer-implemented method of claim 1, further comprising receiving second user input from the user validating the second annotations.
- 4. The computer-implemented method of claim 3, wherein, in response to the user validating the second annotations, generating third annotations.
- 5. The computer-implemented method of claim 4, wherein the third annotations comprise vertebra labels and disc labels.
- 6. The computer-implemented method of claim 1, wherein the annotations comprise vertebrae labels.
- 7. The computer-implemented method of claim 1, wherein the first annotations are generated in response to receiving initial user input from the user identifying a vertebra on the spinal image.
- 8. The computer-implemented method of claim 1, wherein the first annotations are generated based on first spatially ordered points and the second annotations are generated based on second spatially ordered points, wherein the second spatially ordered points account for the first user input.
- 9. The computer-implemented method of claim 1, wherein the first annotations are generated based on an optimization model, a statistical model, or contextual information associated with a spine or vertebrae.

10. The computer-implemented method of claim 1, wherein generating the second annotations comprises reassigning a label of a vertebra labeled by the first annotations.

11. A computer readable storage medium including computer program code to be executed by a processor, the computer program code, when executed, to implement a method to annotate a spinal image, the method comprising:

- generating first annotations on a spinal image;
- receiving first user input from a user on the first annotations to identifying an error within the first annotations; and
- in response to receiving the first user input, generating second annotations on the spinal image, the second annotations to correct the error present within the first annotations.

12. The computer readable storage medium of claim 11, wherein generating the first and second annotations is independent of the first input received.

13. The computer readable storage medium of claim 11, further comprising receiving second user input from the user validating the second annotations.

14. The computer readable storage medium of claim 13, wherein, in response to the user validating the second annotations, generating third annotations.

15. The computer readable storage medium of claim 14, wherein the third annotations comprise vertebra labels and disc labels.

16. The computer readable storage medium of claim 11, wherein the annotations comprise vertebrae labels.

17. The computer readable storage medium of claim 13, wherein the first annotations are generated based on first spatially ordered points and the second annotations are generated based on second spatially ordered points, wherein the second spatially ordered points account for the first user input.

18. A system, comprising:

an processor, wherein in response to receiving a first user input via a data input, the processor is to generate first annotations on a spinal image, the processor is to cause the spinal image having the first annotations to be displayed at a user interface, the processor is to prompt a user to provide second user input identifying an error in the first annotations, wherein in response to receiving the second user input, the processor is to generate second annotations on the spinal image, the second annotations to correct the error in the first annotations.

19. The system of claim 18, wherein the processor is to cause the spinal image having the second annotations to be displayed at the user interface and to prompt the user to provide third user input.

20. The system of claim 20, wherein the third user input validates the second annotations or identifies an error in the second annotations.

* * * * *